




INSTALLATION AND SAFETY INSTRUCTIONS  
INSTRUCTIONS POUR L'INSTALLATION ET LA SÉCURITÉ  
EINBAU- UND SICHERHEITSHINWIESE  
MONTERING- OCH SÄKERHETSINSTRUKTIONER

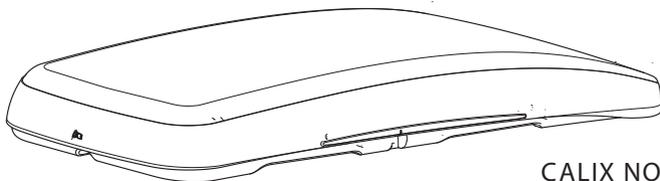


CALIX NORDIC LOADER

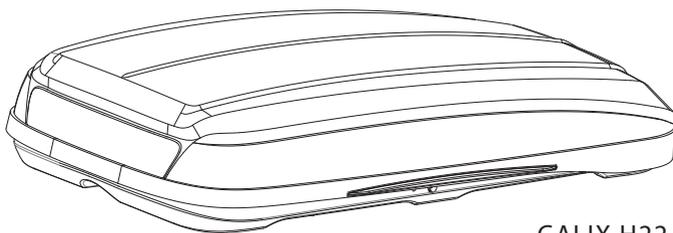

CALIX H22 / H20 / H18

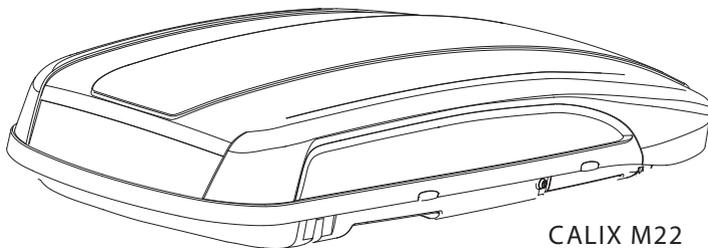

CALIX M22

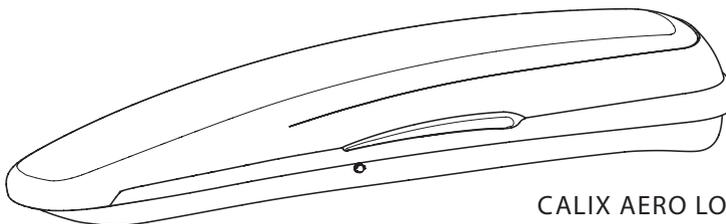


CALIX AERO LOADER

# INCLUDED PARTS




A




B

X3





C


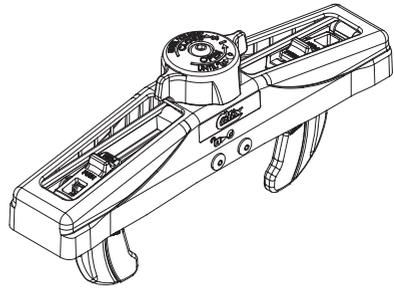


D



X4

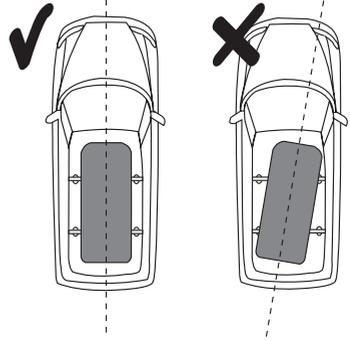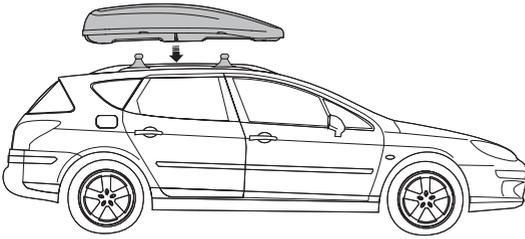

Model	Dimensions in mm				
	L <sub>min</sub>	L <sub>max</sub>	W	H	R <sub>min</sub>
Nordic Loader	700	1100	937	248	440
H18	600	850	901	433	460
H20	700	1100	937	350	425
H22	700	1100	941	362	570
M22	700	1010	810	310	575
Aero Loader	For dimensions Aero Loader please find 1b page 4				

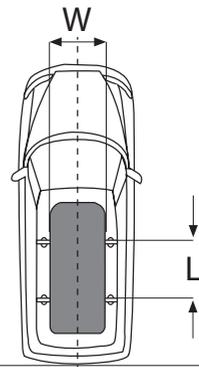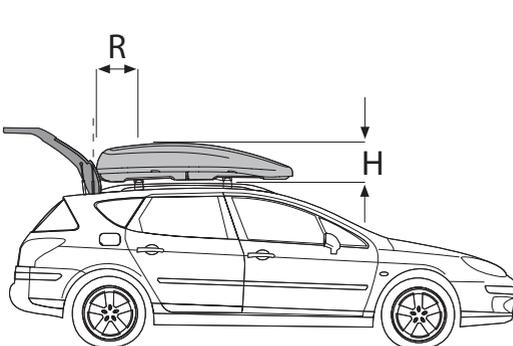



! Installation only applicable for model Aero Loader

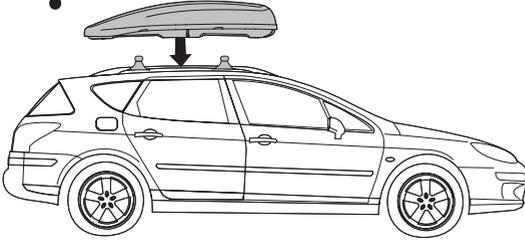


! Installation only applicable for model Aero Loader



Model	Dimensions in mm				
	L <sub>min</sub>	L <sub>max</sub>	W	H	R <sub>min</sub>
Aero Loader	700	1100	809	361	590

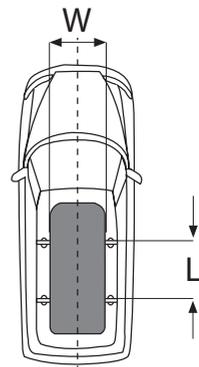
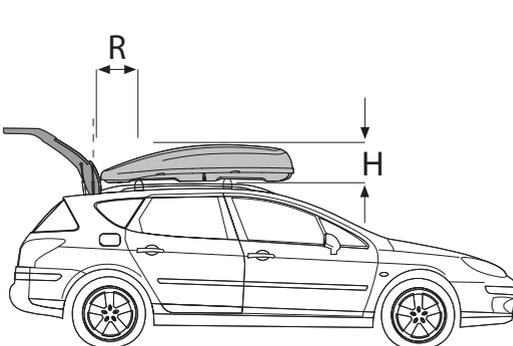


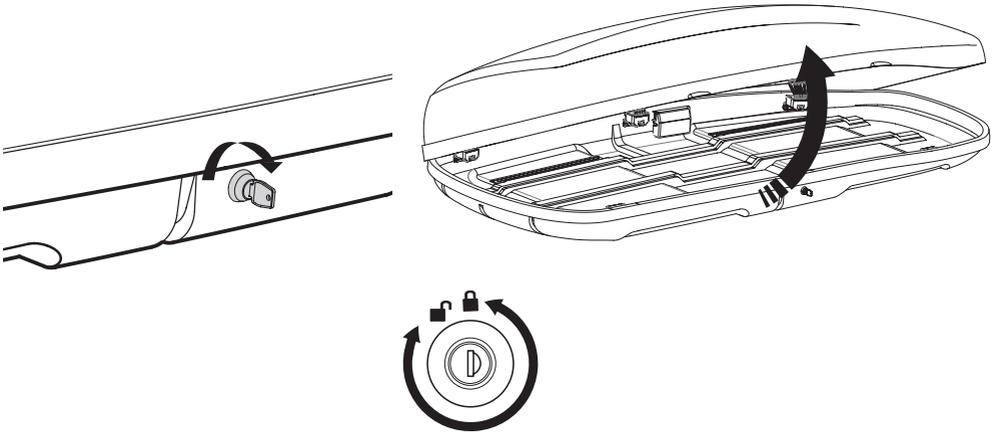

2

# INSTALLING

Compatible with  
Roof Rack dimensions:

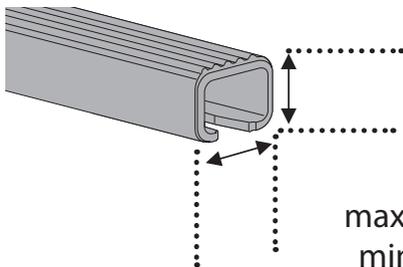


max 32 mm  
min 15 mm


max 100 mm  
min 25 mm

3


Unlock.  
Open by rotating the knob  
until the orange indicator is  
in unlocked position.




X4

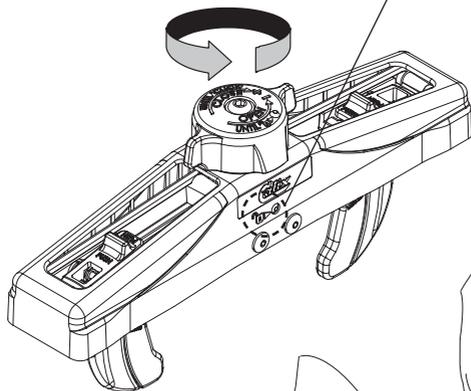


Start position.  
Push the hooks apart.

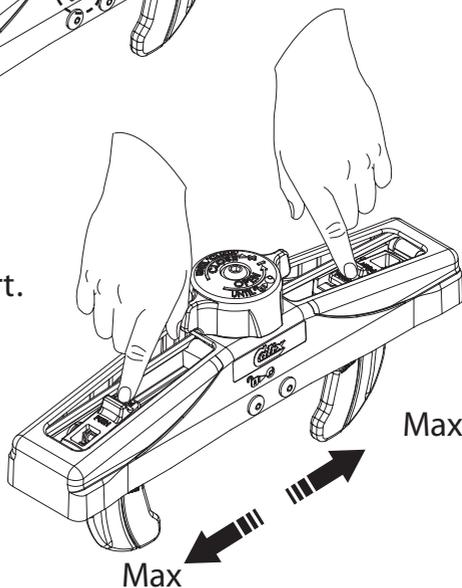

4



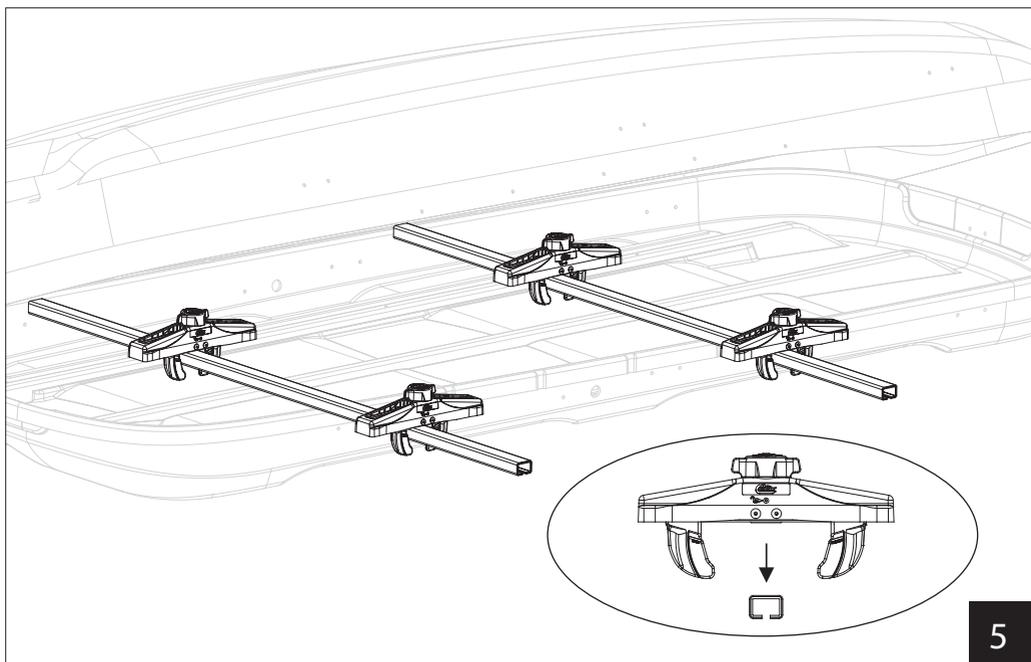


5

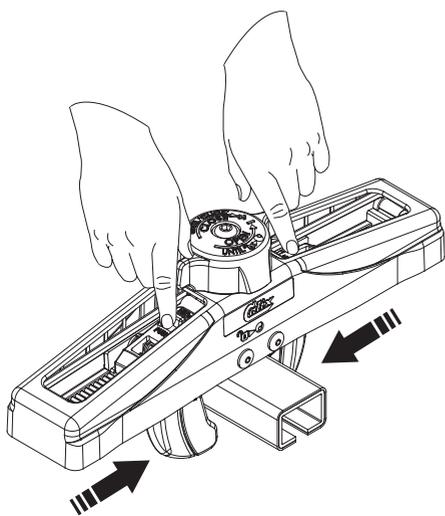


Push together until both hooks meet roofrack.

6



7

Turn clockwise until "click".  
Ready to go.

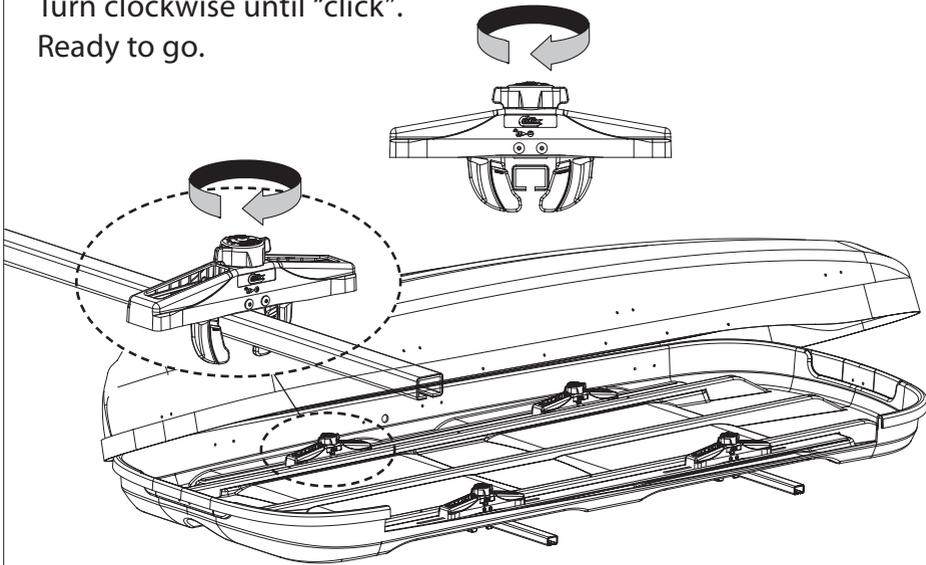


8


## LOADING

Important!

All load/items are to be fastened  
with the loading straps.

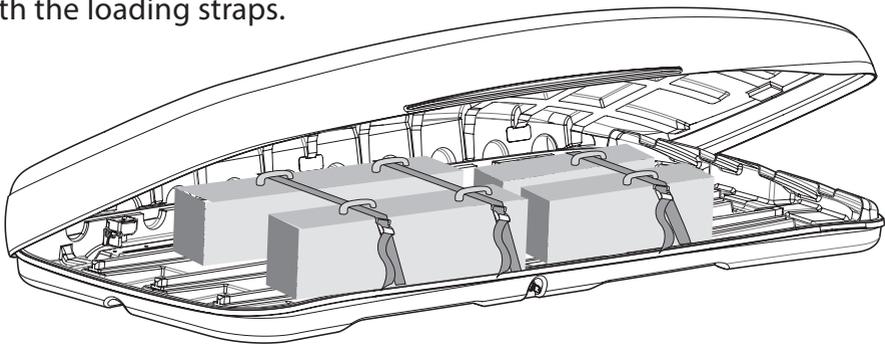

9

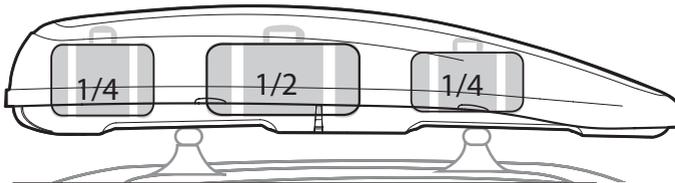



75 kg

10

Nordic Loader	30 kg
H22	26 kg
H20	22 kg
H18	19 kg
M22	23 kg
Aero Loader	20 kg


Check drivers manual for maximum permitted roof load of your car.

+ 75 kg < max

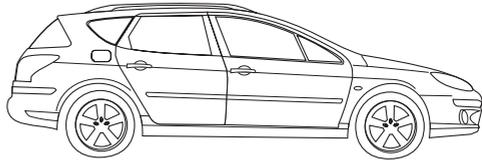


The roof box is water resistant, not completely water proof.

11

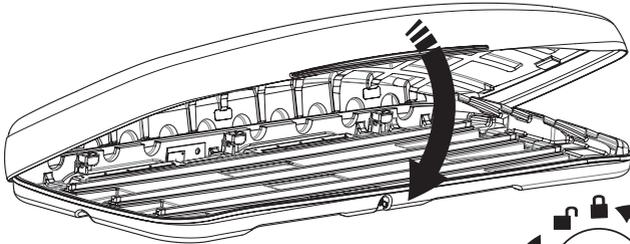


Close lid and turn key to lock.



12


Remove the key and close the cover to protect the lock.

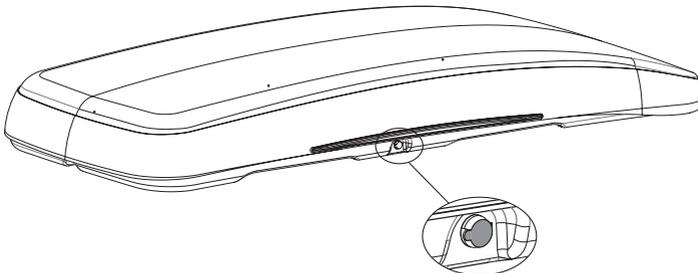


13




# SAFETY

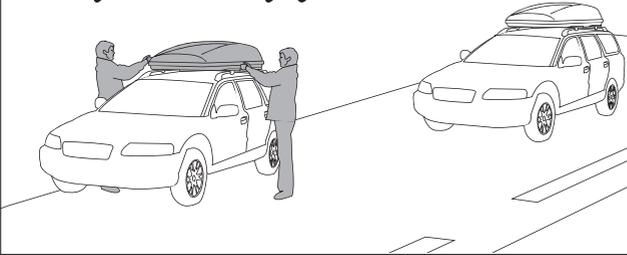

Please consider difference in car behavior (crosswinds, cornering and braking)

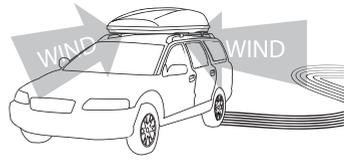


max km/h

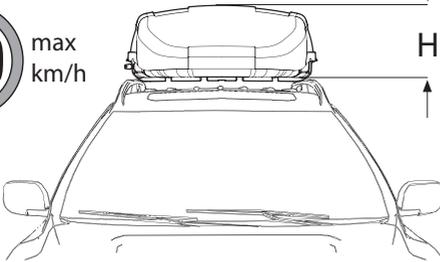

H Page 3

Place sticker on dashboard

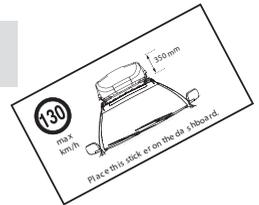




## Check!

4x/year

Check that all Quick Grips are firmly mounted before driving.

Repeat after first 10 km and 4x/year: Turn clockwise until "click" to ensure that roof box is secured.

Store Quick Grip in a clean environment when not in use. Check for dirt before use.

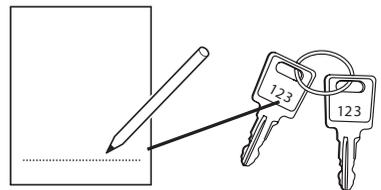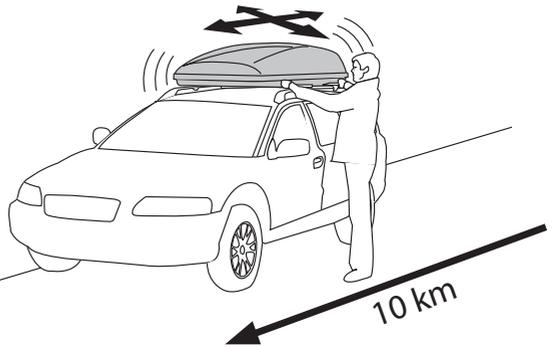

NOTE

Be aware of the changed height of the car with roof box mounted

NOTE

Check before you start driving that the box is properly locked and the key is removed

NOTE

If the car is washed in automatic washing remove the roof box from the car

NOTE

Please note that wind noise may occur when driving with roof box mounted on a car

NOTE

The roof box must always be kept in lying down position when not in use

NOTE

Keep your manual together with the car's instruction manual

NOTE

Installation and handling that deviate from this manual will render the warranty void and can cause damage to the car and the surrounding environment



Autoform AB  
Box 155  
SE-782 24 Malung  
Sweden

Phone: +46(0)280-59 33 00  
E-mail: [info@autoform.se](mailto:info@autoform.se)  
[autoform.se](http://autoform.se)

For energy saving and safety reasons,  
remove roof box and roof racks when not in use.