

SKF Technical Bulletin

VKBA 5425 – New SKF wheel bearing design with Mandatory mounting instructions to follow



RENAULT C/T/K series, Magnum, Premium 2, Kerax
VOLVO FE, FH, FH 12, FH 16, FM, FM 7, FM 9, FM 12, B 6, 7700, 8500, 8700, 9700, 9900



New SKF Wheel bearing design with Mandatory mounting instructions MI-542647 to follow



OE Nb: Renault 742096783, 7421021391 and Volvo 20967831, 21021391

For above applications, SKF has applied a new wheel bearing design with specific fitting instructions. The outboard and inboard seals are delivered as separate components in the Wheel bearing kit VKBA 5425.

Note! The mounting tool is pre-assembled on the bearing and should not be removed before the bearing is mounted into the knuckle!




Alternative Design



Basic Design



Mounting tool

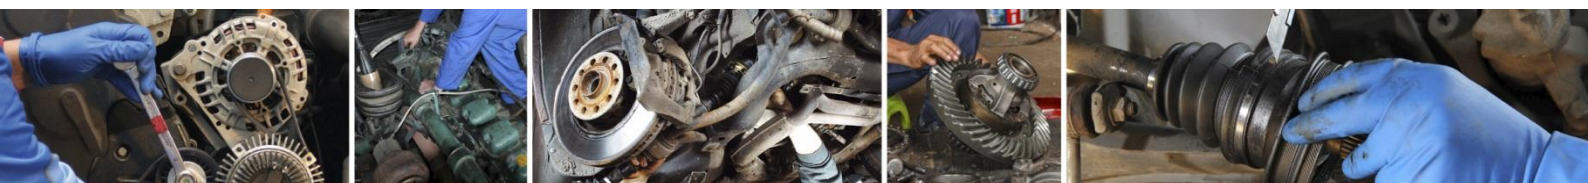

VKBA 5425 – New SKF wheel bearing design with Mandatory mounting instructions to follow



It is mandatory to follow below SKF Fitting Instructions (MI-542647) showing the complete mounting, available through the QR Code printed on the SKF box (or flash QR code below) and in E-catalogues such as TecDoc.

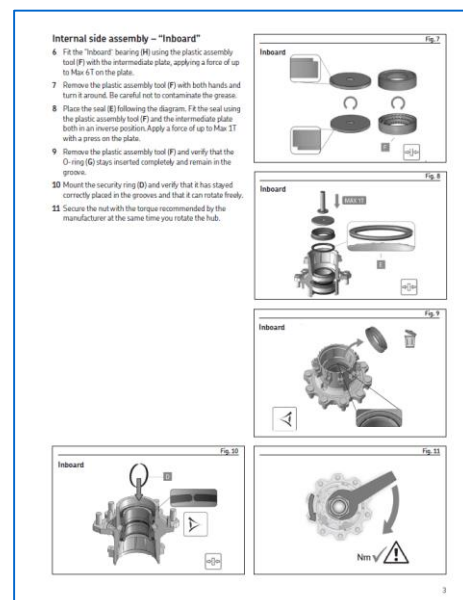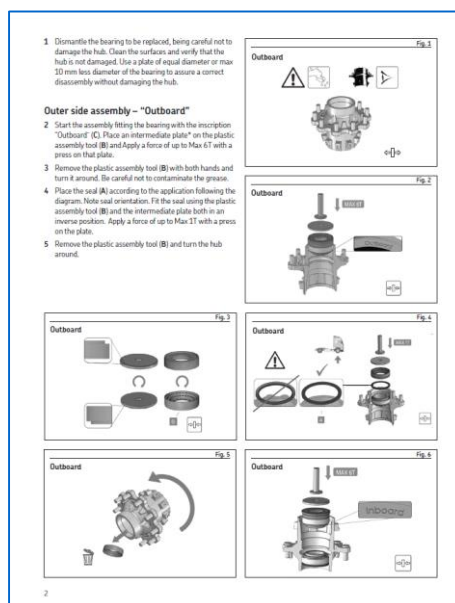

[Click here to watch SKF technical videos on Youtube](#)

© SKF Group 2016

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use

