

• Scania

To connect a rearview camera (with or without motorized shutter) at Scania AUS4 (Harman) monitor.

The straight HSD connector from model ADP-39S must be connected to Camera 1 input (purple) from the Scania AUS4 (Harman) monitor.


The yellow wire from model ADP-39S must be connected to position E9 in the ISO connector from the Scania AUS4 (Harman) monitor.

Note!

Canbus activation must be selected ON by Scania workshop (in case not yet selected by Scania factory).

* In case 2 cameras are required (rearview and sideview), then interface model IF AUS4-2C(H) should be applied, instead of model ADP-39S.

• Connection

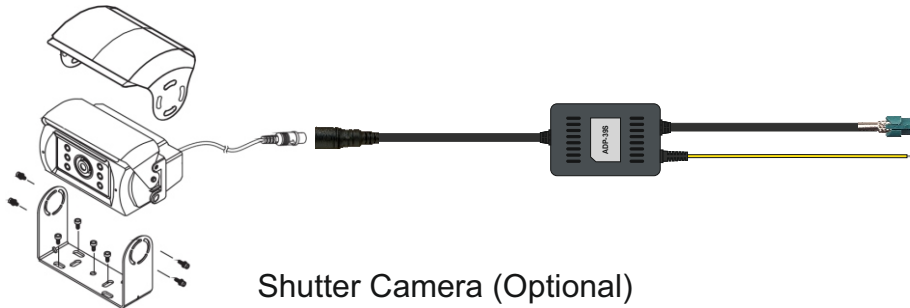

ADP-39S

(Shutter) Camera Adapter
for Scania AUS4 (Harman) monitor

