

TIRE CHANGER

ELECTRIC-PNEUMATIC, WITH MOUNTING HEAD AND TYRE LEVER

The electric-pneumatic tyre fitting machine **HP-440Q.22G/M - HP440Q.22GPLUS/M** is suitable for passenger cars with a rim diameter of 10 to 22 inches. It is available in both the Basic version as well as the Plus version with lifting arm.

+ For rim diameters from 10 to 22 inches
+ With mounting head and tyre lever
+ Basic model with good price-performance ratio, available in two versions

For model HP440Q.22GPLUS/M, the auxiliary mounting arm must be mounted by the customer.

Pneumatic tilting foot pedal-operated mounting column

2 speeds (7 and 14 rpm)

Pneumatic 4-claw clamping for rim diameters from 10 and 22 inches tensioned toward the outside and/or 12 to 24 inches tensioned toward the inside

With mounting head and tyre lever

Straight tyre lever included in delivery

Operation by means of a foot pedal, mounting head can be pneumatically toggled both horizontally and vertically

Extendable pedal unit for easy maintenance

Illustration shows: HP440Q.22G/M

Illustration shows: HP440Q.22GPLUS/M

HIGHLIGHTS IN DETAIL




1 Removable pedal unit for easy maintenance

2 Maintenance unit with pressure regulator

ACCESSORIES ON REQUEST

- + Retrofit helper arm (Plus73 for HP440Q.22G/M)
- + Plastic protection for bead breaker blade (5 pieces; 811059)

HP440Q.22G/M
HP440Q.22GPlus/M

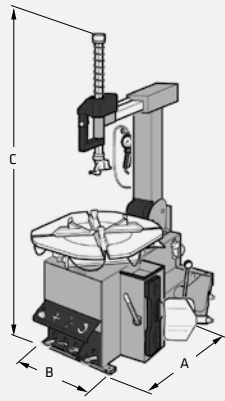


Model	HP440Q.22G/M	HP440Q.22GPlus/M
Clamping range inside	13-23" (12-22", 14-24") ¹	13-23" (12-22", 14-24") ¹
Clamping range outside	11-21" (10-20", 12-22") ²	11-21" (10-20", 12-22") ²
Wheel width max.	13"	13"
Wheel diameter max.	1000 mm	1000 mm
Wheel weight max.	75 kg	75 kg
Automatic bead-breaking movement	X	X
Bead-breaking force	3000 kg	3000 kg
Rotation speed	7/14 rpm	7/14 rpm
Torque max.	1200 Nm	1200 Nm
Motor power	max. 1,1 kW	max. 1,1 kW
Electrical connection	3 Ph, 400 V	3 Ph, 400 V
Fuse protection	16 A träge	16 A träge
A Width	1120 mm	1120 mm
B Depth	1580 mm	1580 mm
C Height	1890 mm	1890 mm
Weight	229 kg	251 kg
Article number	812461	812465

¹ The clamping range can be decreased to 12-22 inches or increased to 14-24 inches by unscrewing an inner hexagonal screw located on each clamping jaw.

² The clamping range can be decreased to 10-20 inches or increased to 12-22 inches by unscrewing an inner hexagonal screw located on each clamping jaw.

SCOPE OF DELIVERY



- 1** Clamping jaws Plastic protection (G800A131)
 - 2** Mounting head Plastic protection (G800A132)
 - 3** Helper arm incl. pneumatic bead depressor (for Plus Version)
 - 4** Tire filler operation via foot pedal
- + Bead breaker blade plastic protection (1 piece; 811797)