


HSF Dual Seal Shrink Push-on Fully Insulated Terminal (Easy Entry)

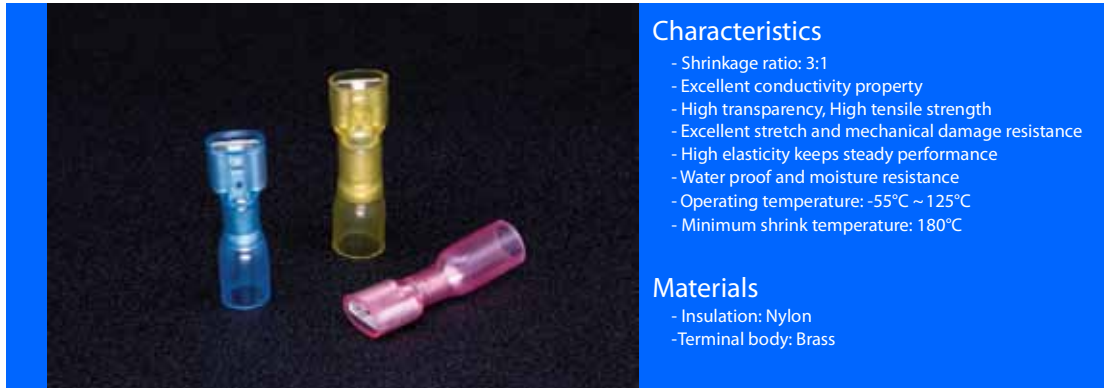


Application

HSF series is the high transparency heat shrinkable tubing made by Nylon, with adhesive lining to protect splices from water and corrosion. It provides strain relief and anti-vibration in rugged environment, and completely insulates and protects electrical connections. The high purity brass part provides excellent conductivity. The easy entry sleeve outside the terminal can quickly guide the wire for easy installation. It offers long duration performance, easy installation, and low installing cost, which is more reliable than conventional crimp terminals.

Technical Data

Property	Specification Requirement	Test Method	Typical Value
Tensile strength (Room temp.)	Min. 10.4Mpa	UL224	18.5Mpa
Elongation at break (Room temp.)	Min. 200%	UL224	450%
Tensile strength after aging (158°C 168hrs)	Min. 7.3Mpa	UL224	15Mpa
Elongation after aging(158°C 168hrs)	Min. 100%	UL224	220%
Voltage withstand (Un-aged)	Withstand 2.5kV for 1 minute and breakdown	UL224	Pass
Voltage withstand (Aged)	Withstand at least half of un-aged breakdown voltage for 1 minute and breakdown	UL224	Pass
Cold bend (-30°C 1hrs)	No crack	UL224	Pass
Maximum secant modulus (2%)	173Mpa	UL224	Pass
Volume resistivity	Min. 10 ¹⁴ Ω·m	UL224	Pass
Heat shock (250°C 4hrs)	No crack	ASTM D2671	Pass
Dielectric strength	>15.8kV/mm	ASTM D2671	>25kV/mm

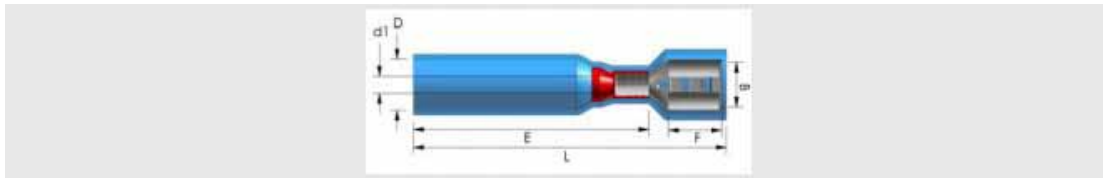

Part No.	D	d1	B	Tab	L	Color	Conductor	Wall of Copper Terminal
HSF 1.25-187A8	4.8	1.6	5.2	4.8× 0.8	30	Red	0.5-1.5mm ² (22-18 AWG)	0.4mm
HSF 2-187A8	5.8	2.2	5.2	4.8× 0.8	30	Blue	1.5-2.5mm ² (16-14 AWG)	0.4mm
HSF 5.5-187A8	6.8	3.4	5.2	4.8× 0.8	32	Yellow	4-6mm ² (12-10 AWG)	0.4mm
HSF 1.25-250A	6.2	1.6	6.6	6.3× 0.8	30	Red	0.5-1.5mm ² (22-18 AWG)	0.4mm
HSF 2-250A	6.2	2.2	6.6	6.3× 0.8	30	Blue	1.5-2.5mm ² (16-14 AWG)	0.4mm
HSF 5.5-250A	6.8	3.4	6.6	6.3× 0.8	32	Yellow	4-6mm ² (12-10 AWG)	0.4mm

Other sizes are available upon request.

Standard color: Red, Blue, Yellow.